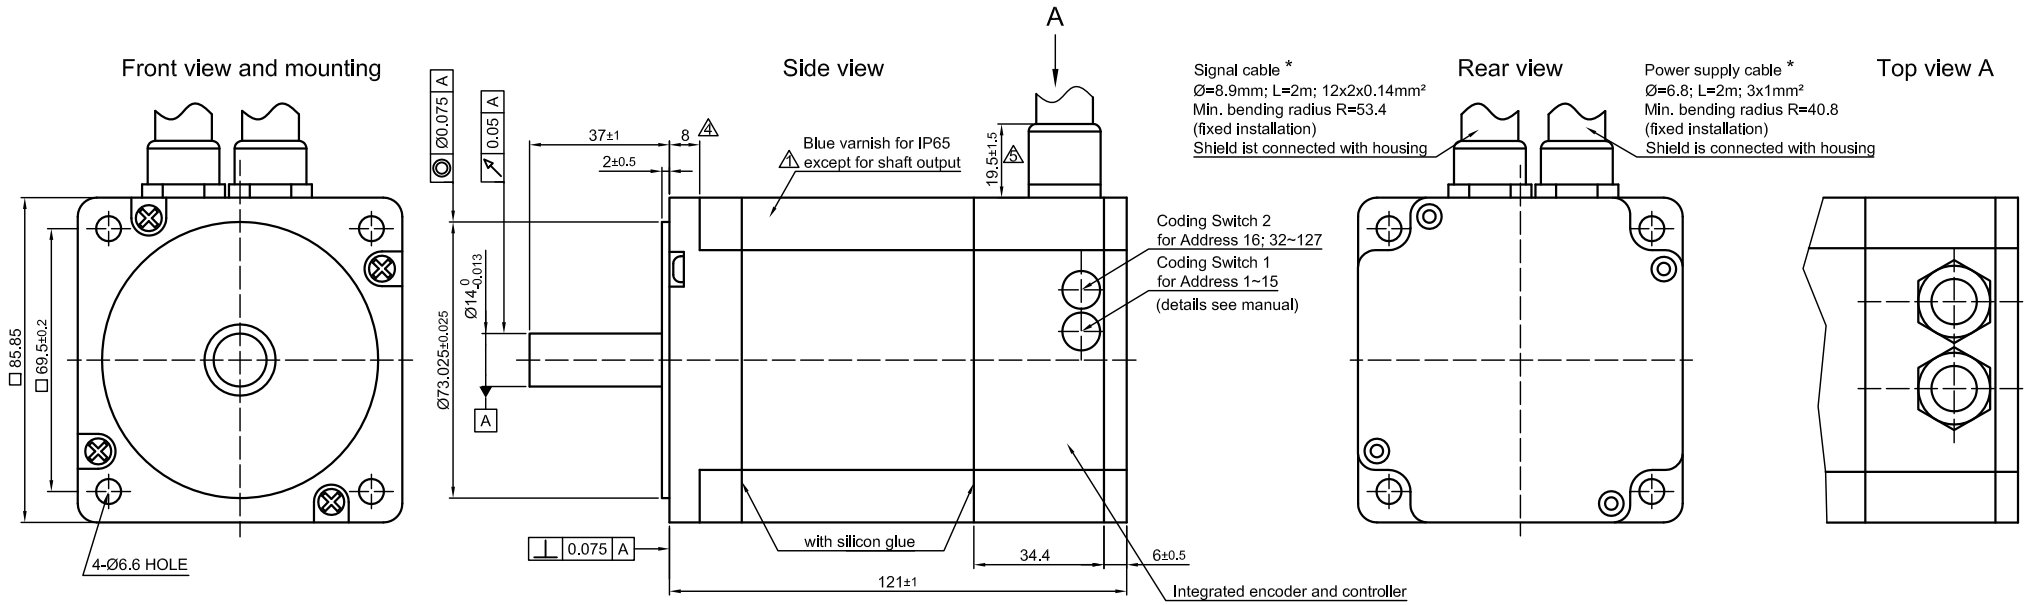

SPECIFICATION \ CONNECTION	BIPOLAR PARALLEL
SUPPLY VOLTAGE (VDC)	24 to 48
AMPS/PHASE	* adj. to 11A (rated 7A)
HOLDING TORQUE (Nm) [lb-in]	5.94 [52.57]
DETENT TORQUE (Nm) [lb-in]	0.11 [0.974]
STEP ANGLE (°) ± ACCURACY	* 1.8 to Microstep
WEIGHT (Kg) [lb]	3.4 [7.5]

* adjustable with Nanopro.

INPUT CONNECTION

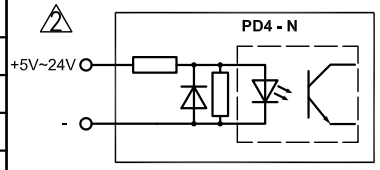

OUTPUT CONNECTION

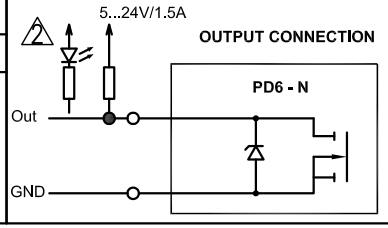

PERMISSIBLE RADIAL+AXIAL FORCE

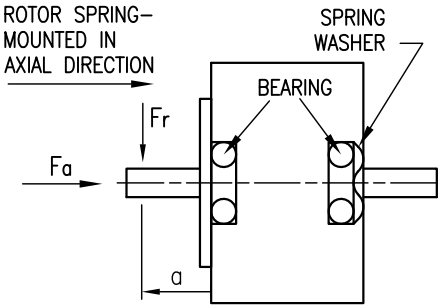

SIGNAL CABLE	
FUNKTION	COLOUR
INPUT 1	BK
INPUT 2	VI
INPUT 3	GY/PK
INPUT 4	RD/BU
INPUT 5	WH/GN
INPUT 6	BN/GN
INPUT ANALOG	WH/BU
OUTPUT 1	WH/YE
OUTPUT 2	YE/BN
OUTPUT 3	WH/GY

SIGNAL CABLE	
FUNCTION	COLOUR
RS485 Tx+	GY
RS485 Tx-	PK
RS485 Rx-	YE
RS485 Rx+	GN
CAN +	BN
CAN -	WH
SIGNAL GND (COM)	GY/BN
GND 3	BN/PK + BU
GND LOGIC	RD
+ UB LOGIC	WH/PK (20~48V)

POWER SUPPLY CABLE	
FUNKTION	WIRE NO./COLOUR
+UB	1
GND	2
PROTECTIVE WIRE	GN/YE

OVERTEMPERATURE PROTECTION (ELECTRONICS): 80°C	AXIAL-FORCE Fa (N)	Fa=65			
AMBIENT TEMPERATURE -10°~ 50°C [14°F ~ 122°F]	DISTANCE a (mm)	5	10	15	20
INSULATION RESISTANCE 100 MOhm (UNDER NORMAL TEMPERATURE AND HUMIDITY)	RADIAL-FORCE Fr (N)	535	355	256	200
INSULATION (MOTOR) CLASS B 130° [266°F]		AXIAL		RADIAL	
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)	SHAFT PLAY (mm)	0.075		0.025	
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)	AT LOAD MAX: (N)	10		5	

☞ ALL GND AND COM SHOULD BE CONNECTED

* OPTIONALLY WITH POWER CHAIN CABLE/UL LICENSED. FOR SIGNAL CABLES ARE NOT ALL I/O'S AVAILABLE.

REV	DESCRIPTION	DATE	DRN
5	change dimension	13.12.16	A.S.
4	change dimension/ rework draw	01.03.16	A.S.
3	PIN COLOR	09.02.12	J.W.

Nanotec® PLUG & DRIVE

Surface specification DIN ISO 1302	General tolerances DIN ISO 2768- cH	Work piece edge DIN ISO 13715

APVD	S.Ha.	13.07.09
CHKD		
DRN	J.W.	13.07.09
SIGNATURE		DATE

STEPPING MOTOR

DWG.NO

PD6-N8918M9504